



东莞市速业精密机械有限公司



马力HP-4P	减速比 RATIO	本体 CODE	型号 SHAFT DIAMETER	A1	A2	A3	D	E	F	G	H	L	J	K	M1	M2	X	Y	Z1	Z2	重量KG
100W 1/8HP	250-1800	1#+2#	22	365	385	369	65	130	163	90	11	15	18.2	56	127	127	152	97.5	116	116	13.2
200W 1/4HP	250-1800	1#+3#	28	410	430	414	90	140	180	122	11	15	20.8	65	127	127	180	116	116	116	29.6
400W 1/2HP	250-1800	2#+4#	32	491	510	495	130	170	215	160	13	25	30.2	76	127	159	210	138.5	116	133	42.6
750W 1HP	250-1800	3#+5#	40	561	594	561	150	210	260	185	15	25	42.2	80	159	190	248	160	133	145	59

出力轴尺寸 OUTPUT SHAFT SIZE

出力轴SHAFT		键槽KEYWAY			键KEY
Sh6	P	W	T	Q	SPEC
Φ22	40	7	25	35	7×7×35
Φ28	45	7	31	40	7×7×40
Φ32	55	10	35.5	50	10×8×50
Φ40	65	10	43.5	60	10×8×60

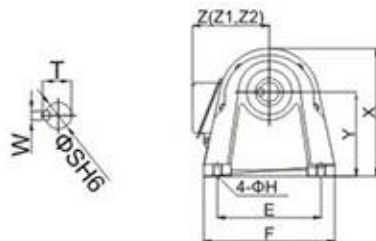

- A1、M1、Z1为三相马达尺寸。
- A2、M2、Z2为单相马达尺寸。
- A3为三相带刹车马达尺寸。
- A1、M1、Z1 are the sizes of three-phase motors.
- A2、M2、Z2 are the sizes of single-phase motors.
- 请选用标准框号齿轮减速马达，如特殊原因需选择缩框型
- Please select standard gear motor, for special cases, select shrinkable gear motor.